

Corrugate Tube




APPLICATION

This specification applies to heat resistant corrugated tubes (hereinafter call " tube ") for use in protection and bundling of wire harness.

FEATURES

Related standards : ISO 527 , 1817 , 3611
4589 - 1,2,6906,ASTM D 4485
Rate Temperature : 85°C

TYPE AND DIMENSIONS

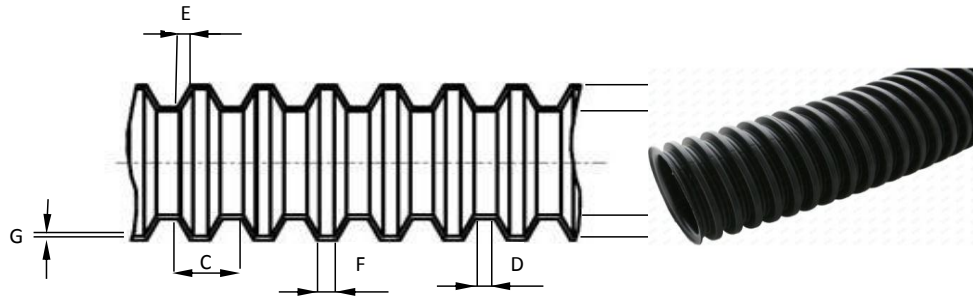

| Normal Die | Slit | A (mm) | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) | G (mm) |
|------------|------|------------|------------|-----------|-----------|-----------|-----------|-------------|
| 5 | Yes | 5.1 ± 0.5 | 7.6 ± 0.4 | 2.5 | 0.60 | 0.27 | 1.4 | 0.20 ± 0.07 |
| 7 | Yes | 7.4 ± 0.4 | 10.2 ± 0.4 | 2.7 | 0.60 | 0.3 | 1.5 | 0.27 ± 0.1 |
| 10 | Yes | 10.7 ± 0.4 | 14.1 ± 0.4 | 2.7 | 0.60 | 0.3 | 1.5 | 0.27 ± 0.1 |
| 13 | Yes | 13.2 ± 0.4 | 17.5 ± 0.4 | 3.5 | 0.70 | 0.45 | 1.9 | 0.27 ± 0.1 |
| 15 | Yes | 15.2 ± 0.4 | 19.5 ± 0.4 | 3.5 | 0.70 | 0.45 | 1.9 | 0.27 ± 0.1 |
| 19 | Yes | 19.5 ± 0.4 | 23.8 ± 0.4 | 3.5 | 0.70 | 0.5 | 1.9 | 0.27 ± 0.1 |
| 22 | Yes | 22.1 ± 0.4 | 27.0 ± 0.4 | 4.2 | 0.80 | 0.5 | 2.4 | 0.30 ± 0.1 |
| 25 | Yes | 25.1 ± 0.6 | 30.0 ± 0.5 | 4.3 | 0.80 | 0.5 | 2.5 | 0.35 ± 0.1 |
| 28 | Yes | 28.2 ± 0.6 | 34.0 ± 0.5 | 4.4 | 0.80 | 0.55 | 2.5 | 0.35 ± 0.1 |
| 32 | Yes | 32.4 ± 0.6 | 38.0 ± 0.5 | 4.4 | 0.80 | 0.55 | 2.5 | 0.35 ± 0.1 |
| 36 | Yes | 36.7 ± 0.6 | 44.0 ± 0.5 | 4.6 | 0.90 | 0.6 | 2.5 | 0.35 ± 0.1 |

| Symbol | Material |
|--------|---------------|
| P.P | Polypropylene |

** Color of tubes shall be black as standard



Restriction of Hazardous Substances



Registration Evaluation and Authorization of Chemicals



Flameability Resistance



Chemical Resistance