


### APPLICATION

Single-core cables for Roload vehicles.  
 Advantage : CIVUS is using stranded and compacted circular conductor.Has high flexibility and easy.

### FEATURES

Insulation : PVC 85°C  
 Conductor : JIS C3102  
 Temperature : -40°C~85°C  
 Flame retardant : ISO 6722 Resistance to flame propagation angle of 45°  
 Standard : JASO D611

### CONSTRUCTION AND PERFORMANCE

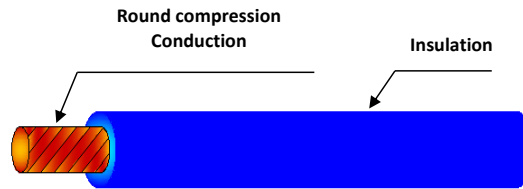

Conductor (Annealed copper stranded conductors)			Insulation Thickness (mm)	Outside Diameter (mm)	Mass (g/m)
Size	Construction (No. / mm)	Outer Diameter (mm)			
0.22	7/SB	0.55	0.20	0.95	2.7
0.35	7/SB	0.70	0.20	1.10	3.9
0.50	7/SB	0.85	0.20	1.25	5.4
0.75	11/SB	1.00	0.20	1.40	7.6
1.00	16/SB	1.20	0.20	1.60	10.1
1.25	16/SB	1.40	0.20	1.80	12.6

\*\* SB : Round Compression ,

\*0.22~1.25 mm<sup>2</sup> conductor material is copper.



Restriction of Hazardous Substances



Registration Evaluation and Authorization of Chemicals



Flameability Resistance



Abration Resistance



Chemical Resistance